ÖKO-LAVAMAT 70630 update

The environmentally friendly washing machine

User information



Dear Customer,

Please read this user information carefully.

Pay particular attention to the section "Safety" on the first Info pages. Please keep this user information in a safe place for later reference. Pass it on to any future owners of the unit.



The warning triangle and /or signal words (Warning!, Caution!, Important!) emphasise information which is important for your safety or for the unit's functional reliability. It is imperative that this information is observed.

- 1. This symbol guides you step by step through the operation of the appliance.
 - 2. ...
- \mathbf{i}

Next to this symbol you will find additional information and practical tips on using the appliance.



Tips and information on economical and environmentally responsible use of the unit are identified with the clover leaf.

For any faults which occur, this user information contains information on how to remedy these faults yourself. See the section "What to do if ..."

Printed on recycled paper.

Thinking ecologically means acting ecologically.

CONTENTS

Operating Instructions	6
Safety	6
Disposal	8
Environmental tips	8
Unit description Front view Drawer for detergent and care agent Control panel Program selector Additional program buttons	9 9 10 10 12
Consumption values and time requirements	13
What does "UPDATE" mean?	13
Before the first wash	14
Prepare washing cycle Sort washing and prepare Washing Types and Care Symbols Detergents and care agents Which detergent and care agent? How much detergent and care agent? Water softener	14 14 15 16 16 16
Run a washing cycle Brief instructions Setting the Washing Program Change the spin speed /select Rinse Hold Set the delay timer / soaking duration Opening and closing the filling door Add the washing Add detergent/care agent Start the washing program Completion of the Washing Program Change program The washing cycle is finished/Remove the washing	17 17 18 19 20 21 22 22 23 24

Contents

Program tables Washing Separate conditioning/starching/impregnation Separate rinse Separate spin	25 25 26 26 26
Cleaning and Care Control panel Detergent Drawer Washing Drum Main door Cleaning the drain pump	27 27 27 28 28 29
What to do if Remedying faults If the washing results are not satisfactory Carrying out emergency drainage Additional Rinse + (RINSE+)	30 30 34 35 36
Child Safety Feature	37
Installation and connection instructions	38
Installation Safety Precautions	38
Installation of the appliance Transporting the appliance Remove transportation protection Prepare the installation place Installation on a concrete base Installation on vibrating floors	39 39 39 41 41 41
Compensate for floor unevenness	42

Electrical connection	43
Water connection Permissible water pressure Water inflow Water drain Delivery heads over 1m	43 44 45
Technical data	46
Dimensions	46
Guarantee conditions	47
Customer services	49
Index	54
Service	55

Operating Instructions



Safety

The safety aspects of AEG electrical appliances comply with accepted technical standards and the German Appliance Safety Law. However, as manufacturers we regard it as our responsibility to inform you about the following safety instructions.

Before Using for the First Time

- Refer to the "Installation and Connection Instructions" further on in this user information
- If units are delivered in the winter months at minus temperatures: Store the washing machine at room temperature for a few hours before putting it into operation.

Correct Use

- The washing machine is only intended for washing normal domestic washing. If the appliance is used for a wrong purpose or wrongly operated, the manufacturer cannot assume any liability for any damages.
- Additions or modifications to the washing machine are strictly forbidden due to safety reasons.
- Use only detergent which is suitable for washing machines. Refer to the detergent manufacturer's instructions.
- The washing must not contain any flammable solvents. Also bear this in mind when washing pre-cleaned washing.
- Do not use the washing machine for dry-cleaning.
- Dves /dye-removing agents may only be used in the washing machine if the manufacturer expressly permits use of these products. We cannot accept liability for any damage.
- Use only water from the water mains. Use rain water or service water only if it meets the requirements defined in DIN 1986 and DIN 1988.
- Frost damage is not covered by the warranty! If the washing machine is in a room subject to possible frost hazards, emergency emptying must be carried out if there is a risk of frost (see the Section "Carrying out emergency emptying").

Child Safety

- Packaging materials (e.g. films, polystyrene) can be dangerous for children. Risk of suffocation! Keep packaging away from children.
- Children frequently cannot recognise hazards involved in handling electrical appliances. Therefore, ensure that they are properly supervised during operation and never allow children to play with the washing machine there is a risk that they can lock themselves inside it.
- Ensure that children or small animals do not climb into the washing machine's drum.
- When disposing of washing machines pull out the mains plug, destroy the door lock, cut off the electrical supply lead and dispose of the plug and remaining cable. This means that playing children cannot shut themselves in and cannot encounter a potentially lethal hazard.

General Safety

- Repairs to the washing machine may only be carried out by qualified specialists. Incorrect repairs may result in significant risk to the user.
 If repairs are necessary, consult our customer service or your specialist dealer.
- Never use the washing machine if the mains cable is damaged or the conrol panel, work surface or base panel area are so badly damaged that the interior of the unit is openly accessible.
- Switch off the washing machine before carrying out cleaning, care and maintenance work. Also pull the mains plug out of the socket or,

 if it is permanently connected, – switch off the circuit breaker at the household power distribution box or completely remove the screw-in fuse.
- Never pull the cable to remove the plug from the socket. Always pull the plug itself.
- Multiple connectors, couplings and extension cables must not be used. There is a risk of fire with overheating!
- Do not spray down the washing machine with a water jet. Risk of electric shock!
- The glass in the door becomes hot in the case of wash programmes with high temperatures. Do not touch!
- Allow the washing solution to cool before carrying out an emergency emptying operation or cleaning the drain pump.
- Small animals can chew the power cables and water hoses. Risk of electric shock and danger of water damage! Keep small animals away from the washing machine.



Disposal

Disposing of the Packaging Material!

Dispose of the packaging of your washing machine correctly. All pakkaging materials used are environmentally-compatible and recyclable.

- Plastic parts are identified with internationally standardised abbreviations:
 - >PE< for polyethylene, e.g. packing films.
 - >PS< for polystyrene, e.g. cushion parts (always CFC-free)
 - >POM< for polyoxymethylene, e.g. plastic clips.
- Cardboard packaging is manufactured from recycled paper and should be deposited in the waste paper collection for recycling.

Disposing of your old appliance!

When you put your unit out of operation one day, please bring it to your nearest recycling centre or to your dealer.




Environmental tips


- A pre-wash cycle is not necessary in the case of washing which is not excessively dirt. This saves detergent, water and time (and is gentle on the environment.)
- If the indicated load capacities are taken full advantage of, the washing machine is especially efficient.
- For small loads, use only one half to one third of the recommended detergent quantity.
- Suitable pre-treatment enables marks and limited amounts of dirt to be removed. You can then wash at a lower temperature.
- Wash slightly to normally dirty cottons with the energy-saving program.
- There is often no need for the softener. Try it once! If you use a drier, your washing will become soft and fluffy even without a softener.
- In the case of medium to high water hardness (hardness range runs to upwards, see "Detergent and care agents"), you should use a water softener. The detergent can then always be metered for hardness range I (= soft).

Unit description


Front view

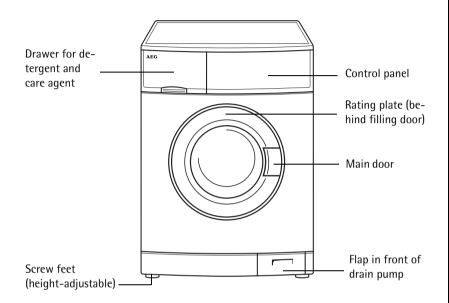

Drawer for detergent and care agent

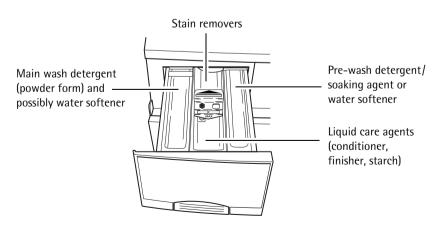

Control panel

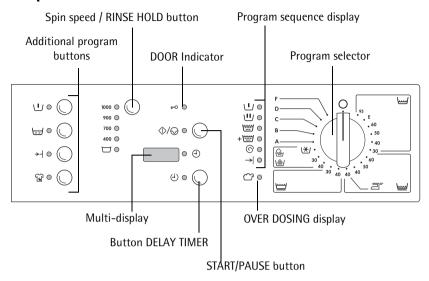

Program selector

The program selector defines the nature of the washing cycle (e.g. water level, drum movement, number of rinses, spin speed) to suit the type of washing, as well as the wash temperature.

○ (OFF)

Switches off the washing machine. All other positions are "switched on".

(COTTONS/LINEN)

Main washing cycle Cottons/Linen (Cottons/Linen) at 30 °C to 95 °C.



Position E (ENERGY SAVING): Energy-saving programme at approx. 67 °C for slightly to normally dirty cottons, extended washing time. Cannot be combined with → (QUICK WASH).

(EASY CARES)

Main washing cycle for easy-care textiles (mixed fabrics) at 40 °C to 60 °C.

世 (DELICATES)

Main washing cycle for delicates at 30 °C or 40 °C.

\@/ (WOOLLENS) / ₩ (Hand Wash)

Main washing cycle (\★//cold to 40 °C) for machine-washable woollens and for woollen textiles and silk with the care symbol 🖼 (Hand Wash).

A (GENTLE RINSE)

Separate gentle rinsing e.g. for rinsing hand-washed textiles (2 rinsing cycles, liquid care agent from compartment & is rinsed in, short spin).

B (STARCHING)

Separate starching, separate conditioner, separate impregnation of damp washing (1 rinsing cycle, liquid care agent from the compartment & is rinsed in, spin).

C (PUMP OUT)

Pumping out the water after a rinse hold (without spin).

(Rinse hold) means: The washing remains lying in the last rinsing water. It is not spun.

D (SPIN)

Pumping off the water after a rinse hold and spin, or separate spin of hand-washed cottons/linen.

F (SHORT SPIN)

Pumping off the water after a rinse hold and gentle spin or separate gentle spin of sensitive textiles (easy-cares, delicates, wool).

Additional program buttons

The additional program buttons are for adapting the washing program to the dirtiness of the washing. Additional programs are not required for washing which is not excessively dirty.

→10 ()

Various functions can be combined with each other, depending on the program.

Warm pre-wash before the main washing cycle which follows on automatically. with intermediate spin or (COTTONS/LINEN) without intermediate spin for (EASY-CARES) and (DELICATES).



(SOAKING)


Approx. 50 minutes at 30°C water temperature. can be extended to max 10 hours and approx 20 minutes with button (4) (DELAY TIMER). This is followed by the main washing cycle.

→ (QUICK WASH)

Short and main washing cycle for slightly dirty washing.

্রে (STAIN)

For treating very dirty washing or stained washing. In-wash stain treatment is added during the program on a time-optimized basis. May only be used for wash temperatures from 40°C as stain removers only become effective at higher temperatures.



Consumption values and time requirements

The values for selected programs in the following tables were determined under normal conditions. However, there is a helpful orientation aid for domestic operation.

Program selector / temperature	Filling quantity in kg	Water in litres	Energy	Time in minutes
(COTTONS/LINEN) 90	5	45	1.70	141
(COTTONS/LINEN) 60 1)	5	42	0.94	126
(COTTONS/LINEN) 40	5	49	0.60	128
(EASY CARES) 40	2.5	54	0.50	84
(DELICATES) 30	2.5	50	0.30	54
(WOOLENS)/((Hand Wash) 30	2	48	0.20	56

¹⁾ Note: Program setting for a test in accordance with EN 60 456. The consumption values deviate from the stated values depending on the water pressure, water hardness, water inlet temperature, room temperature, washing type and quantity, the detergent used, fluctuations in the mains voltage and the selected additional functions.

What does "UPDATE" mean?

Your washing machine's washing programs are controlled by software. New types of textiles or new detergents may require new washing programs in the future. In most cases, the software can be adapted to this. For further information on the "update", please consult the Customer Service. You can also enquire about the costs for an "update" with your Customer Service.

Before the first wash

B

Perform a washing cycle without washing. Program: سيا (COTTONS/LINEN) 95 with half the amount of detergent.

This removes residues left over from production on the drum and solution container.

Prepare washing cycle

Sort washing and prepare

- Sort the washing according to the care symbol and type (see "Washing types and care codes").
- Empty all pockets.
- Remove metal objects (paper clips, safety pins etc.).
- To prevent damage to the washing and tangled washing: Close zip fasteners, button bed and pillow covers closed, tie up loose strings e.g. of aprons.
- Turn articles with double layered textiles inside out (sleeping bags, anoraks etc.).
- In the case of knitted coloured textiles and also with wool and textiles with jewelry attached: turn inside out.
- Wash small and sensitive items (e.g. baby socks, tights and stockings, bras etc.) in a washing net, a cushion with a zip fastener or in larger socks.
- Handle curtains with particular care. Metal rollers or burred, plastic rollers must be removed or tied into a net or bag. We cannot accept liability for damage.
- Coloureds and white items must not be washed together in a washing cycle. This could discolour white washing or turn it grey.
- There is often excess dye in new, coloured items. It is best to wash such items separately the first time.
- Mix small and large items. This improves the washing effect and the washing is more favourably distributed during spinning.
- Fluff washing before placing into the washing machine.
- Do not place folded washing into the drum.
- Pay attention to the care instruction "wash separately" and "wash separately several times".

Washing Types and Care Symbols

The care symbols help you chose the correct washing program. The washing should be sorted according to type and care symbol. The temperatures shown in the care symbols are the maximum temperatures in each case.

Cottons

Textiles made of cotton and linen which carry this care symbol are insensitive to mechanical stress and high temperatures. The programm (COTTONS/LINEN) is suitable for this type of washing.

Linen

Textiles made of cotton and linen which carry this care symbol are insensitive to mechanical stress The programm (COTTONS/LINEN) is suitable for this type of washing.

Easy-care washing

Textiles such as treated cotton, cotton mixed fabrics, viscose and synthetics which carry this care symbol require chemically more gentle treatment. The program (EASY CARES)/ (EASY IRON) is suitable for this type of washing.

Delicates

Textiles such as layered fabrics, micro fabrics, viscose, synthetics and curtains which carry this care symbol require particularly gentle treatment. The program (DELICATES) is suitable for this type of washing.

Wool and especially sensitive washing 6 19 19

Textiles such as wool, wool mixtures and silk which carry this care symbol are particularly sensitive to mechanical stress. The program (WOOLLENS)/ (Hand Wash) is suitable for this type of textile.

Important! Textiles with the care symbol (do not wash!) must not be washed in washing machines.

Detergents and care agents

Which detergent and care agent?

Use only detergents and care agents which are suitable for use in washing machines. Always follow the manufacturer's instructions.

How much detergent and care agent?

The required quantity depends upon:

- extent of soiling of the washing
- on the hardness class of the mains water
- the amount of washing



If the detergent manufacturer does not give any metering quantities for small loads, add a third less for half a load or only half the amount of detergent for small loads for (EASY IRON) which is recommended for a full load.

Observe the instructions for use and dosing provided by the detergent and conditioner manufacturer.

Water softener

For medium to high water hardness (hardness class II upwards), you should use softener. Refer to the manufacturer's instructions. Then always add the appropriate amount of detergent for hardness class I (= soft). The responisable water works will provide information on the local water hardness.



Since the water softener is rinsed in before the main detergent (water pre-softening), 80% of the stated quantity of softener shown on the package is sufficient.

Water hardness details

Hardness class	Water hardness in °dH (German hardness scale)	Water hardness in mmol (millimol per litre)
I - soft	0 - 7	to 1.3
II - medium hard	7 - 14	1.3 - 2.5
III - hard	14 - 21	2.5 - 3.8
IV - very hard	greater than 21	greater than 3.8

Run a washing cycle

Brief instructions

A washing cycle is run in the following steps:

- **1.** Set the correct washing program:
 - Set the program and temperature with the program selector.
 - Set any additional program(s).
 - 2. If necessary, change the spin speed/select (RINSE HOLD).
 - 3. Set the (4) (DELAY TIMER) if necessary.
 - **4.** Open the filling door and fill with washing.
 - **5.** Close the filling door.
 - **6.** Add the detergent/care agent.
 - **7.** Start the washing program with the $\diamondsuit/\diamondsuit$ (START/PAUSE) button.

After the washing program ends:


Important! If the washing cycle ended with a rinse hold, perform C (PUMP OUT), D (SPIN) or F (SHORT SPIN) before opening the filling door.

- **8.** Open the filling door and remove the washing.
- **9.** Switch off the washing machine: Set the program selector to \bigcirc (OFF).

Setting the Washing Program

- For the suitable program, the correct temperature and possible additional programs for the particular washing type, refer to the "Program tables".
- **1.** Set the program selector to the required washing program with the required temperature.


The probable duration of the set program in minutes is shown in the multi display.



2. If necessary, select additional program(s):	
The display of the selected auxiliary program	
lights up.	
 To change the selection, press another button. 	
 To deselect, press the button again. 	
	→ ○ (()

∵ ○ ((

Change the spin speed /select Rinse Hold

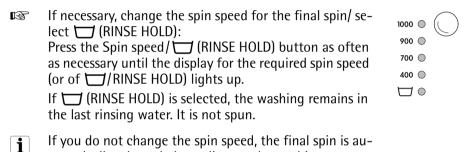

tomatically adapted, depending on the washing program.

- \(\omega \) (COTTONS/LINEN)

- \(\omega \) (EASY CARES)/\(\omega \) (EASY IRON)

- \(\omega \) (DELICATES)

- \(\omega \) (WOOLLENS)/\(\omega \) (Hand Wash)

900 revolutions per minute

900 revolutions per minute

The speed of the intermediate spin depends on the selected program and cannot be changed.

Set the delay timer / soaking duration

Delay timer

The (i) (DELAY TIMER) button allows the start of a washing program to be postponed for between 1 and maximum 19 hours.

To do this, press the (4) (DELAY TIMER) button as often as necessary until the required start delay is shown in the multi display, for example in the form 12h for the postponement of the program start of 12 hours.



⊕ ○ (

If IBh is displayed and you press again,
Bh appears, followed by the run time of the set program
(display in minutes, e.g. 126). No delay timer is set in this state.

Soaking duration

When the (SOAKING) button is pressed, you can extend the soaking period with the (i) (DELAY TIMER) button (maximum 10 hours and approx. 20 minutes).

- Without delay timer, the soaking period is approximately 30 minutes, plus a pre-wash time of 20 minutes.
- To adjust, press the (i) (DELAY TIMER) button as often as necessary until the required soaking period is shown in the multi display, e.g. (h) (=1 hour).

After approximately 2 seconds, the multi display shows the run time in minutes.





This run time is made up as follows:

Selected soaking period e.g. #h = 60 Minutes + Heating-up/pre-wash time e.g. Approx. 20 Minutes + Run time of the selected wash program e.g. Approx. 126 Minutes = Displayed value e.g. Approx. 206 Minutes

While (SOAKING) is running, (PRE-WASH) lights up on the program sequence display.

Opening and closing the filling door

Open: Pull on the handle of the filling door.

-- ○

Close: Press the filling door firmly closed.

The displays \rightarrow (DOOR) and $\diamondsuit/\diamondsuit$ (START/PAUSE) show when the unit is switched on whether the filling door can be opened.



Display ≠o (DOOR)	Display ♦/♦ (START/PAUSE)	Door opening possible?
lights up green	flashes red	Yes
lights up green	lights up red	yes, after the ♦/♦ (START/ PAUSE) key is pressed
is off	flashes red or lights up red	No ¹⁾

1) Filling door is locked because of a high water level or high temperature



lf

- the display → (DOOR) flashes red,
- then the error code E40 flashes in the multi display,
- and the display (MAIN WASH) flashes, an attempt was made to start a washing program without the filling door being correctly closed. In this case, press the filling door firmly closed and start the washing program again.


Add the washing

- For the maximum filling quantities, see the "Program tables".

 See "Sort and prepare washing" for information on correctly preparing the washing.
- **1.** Sort and prepare the washing according to type.
 - 2. Open the filling door: Pull on the handle of the filling door.
 - 3. Fill with washing.

 Important! When closing the door, make sure no items of washing get stuck! This could damage textiles and the unit.
 - **4.** Close the filling door securely.

Add detergent/care agent



1. Open the detergent drawer: grip inside the flap on the drawer at the bottom (1) and pull out the drawer as far as it will go (2).




2. Filling with washing detergent/care agent.

Compartment for in-wash stain treatment

Compartment for powder main detergent

(If you use water softener and require the right compartment for the prewash/soaking detergent, add the water softener to the main detergent in the left compartment.



Compartment for liquid care agent

(Softener, finisher, starch)

Important! Fill the compartment at most to the MAX mark. Fill any viscous agent up to the MAX mark. Dissolve powdery starch.

Note: It is normal for a small amount of water to be left in the compartment for liquid care agent; this will not affect the wash results.

Compartment for pre-wash/soaking detergent
Only for auxiliary programs (PRE-WASH)/(SOAKING)
or for water softener

3. Push the drawer fully in.

If using liquid detergent / tabs

3. I ush the drawer rully in

i

Add liquid detergent / tabs in the amount recommended by the washing detergent industry. Follow the instructions on the washing detergent package.

Start the washing program

- 1. Check that the water valve is open.
 - 2. Start the washing program: Press the ♦/♦ (START/ PAUSE) button. The washing program is started or it starts after the set time expires.



- The filling door is not correctly closed if the \rightarrow (DOOR) display flashes red when the \lozenge / \lozenge (START/PAUSE) button is pressed.
 - The display **→** (DOOR) flashes red
 - The error code **E** ♥**D** then flashes in the multi display
 - And the [™] (MAIN WASH) display flashes.

In this case, press the filling door firmly closed and again press the ♦/♦ (START/PAUSE) button.

If the time preselection is set:

The set delay time runs. The remaining time to the program start is shown in the multi display (in each case full hours, e.g. **5**h). During this time you can load washing or change / abort the time preselection.

- Load washing: Press the ♦/♦ (START/PAUSE) button. The filling door can be opened. Then close the door and press the ♦/♦ (START/ PAUSE) button again.
- Change or abort time preselection: Press the (4) (DELAY TIMER) button as often as necessary until the required time is displayed. When the program run time is displayed (display in minutes, e.g. 126) the washing can start without a delay.

Completion of the Washing Program


Program sequence display

Before the start, the program steps to be carried out are indicated by the Program sequence display. The current program step is displayed during the washing program.



Multi-display

The expected remaining run time (in minutes) is displayed in the multi display until the end of the program.



Change program

Changing or aborting the program

- **1.** Press the \lozenge/\lozenge (START/PAUSE) button.
 - **2.** Turn the program selector to \bigcirc (OFF). The washing program is aborted.
 - **3.** If required, set a new washing program. Otherwise, turn the program selector to C (PUMP OUT) and press the \lozenge/\lozenge (START/PAUSE) button.
- The washing program can be interrupted at any time with the $\diamondsuit/\diamondsuit$ (START/PAUSE) button and can be continued by pressing the button again. Changing the washing program is only possible after the program selector has been turned to \bigcirc (OFF).

Select the additional program

The additional programs $\rightarrow 1$ (QUICK) or \bigcirc (STAIN) can still additionally be selected after the program starts.

- **1.** Press the \lozenge/\lozenge (START/PAUSE) button.
 - 2. Press the $\rightarrow -$ (SHORT) or (\$) (STAIN) button.
 - **3.** Press the $\diamondsuit/\diamondsuit$ (START/PAUSE) button again. The washing program is continued.

Change the Spin Speed

During the washing program, the spin speed can still be changed or (RINSE HOLD) can be set.

- \square 1. Press the \triangle/\bigcirc (START/PAUSE) button.
 - 2. Change the speed with the Spin speed/☐ (RINSE HOLD) button.
 - **3.** Press the $\diamondsuit/\diamondsuit$ (START/PAUSE) button again. The washing program is continued.

The washing cycle is finished/Remove the washing

After a washing program has ended, \rightarrow (END) lights up on the program sequence display.

If \square (RINSE HOLD) was selected, the display next to the \lozenge/\lozenge (START/PAUSE) button flashes.

- **1.** After a rinse hold, it is first necessary to pump off the water:
 - Either press the ◆/♦ (START/PAUSE) button (the water is pumped off the and the washing is spun according to the finished program; After the ◆/♦ (START/PAUSE) button is pressed again, the spin speed can still also be changed during spinning), or
 - Turn the program selector to C (PUMP OFF) and press the ◆/♦
 (START/PAUSE) button (the water is pumped off without spinning), or

After the end of this program step, the \rightarrow (END) indicator will illuminate.

2. Open the filling door.

As soon as the \rightarrow (DOOR) indicator lights up green, the filling door can be opened.

- 3. Remove the washing.
- **4.** Turn the program selector to \bigcirc (OFF).
- 5. Close the water valve.
- **6.** After washing, pull out the washing detergent drawer slightly so that it can dry out. Only lean the door against the washing machine so that the latter can air out.
- If the indicator (OVERDOSING) lights up, too much detergent was used in the washing program just ended. Observe the dosing recommendations of the detergent manufacturer as well as the filling quantity for the next wash.

Important! If the washing machine is not used for a long time: Close the water tap and disconnect the washing machine from the electricity mains.

Program tables

Washing

Not all possible settings are listed below, only those which are normal and appropriate in everyday use.

Type of washing; care symbol	Max. filling quantity (dry weight) ¹⁾	Program selector; temperature	Possible additional programs	
Cottons	5 kg	(COTTONS/LINEN) 95	U (PRE WASH) U (SOAKING) → (QUICK WASH) U (STAIN)	
Energy-saving program: Cottons	5 kg	اسیا (COTTONS/LINEN) E	U (PRE WASH) 证 (SOAKING) 证 (STAIN)	
Linen	5 kg	لسيا (COTTONS/LINEN) 30 to 60	U (PRE WASH) ☐ (SOAKING) → (QUICK WASH) ☐ (STAIN) ²⁾	
Easy Cares	2.5 kg	(EASY CARES) 40 to 60	(PRE WASH)	
60 40	1 kg	(EASY IRON) ³⁾	→ (QUICK WASH) (STAIN)	
Delicates	2.5 kg (or 15-20 m ² curtains)	(DELICATES) 30, 40	U (PRE WASH) ☐ (SOAKING) → (QUICK WASH) ☐ (STAIN) ²⁾	
Woollens/ Hand Wash	2 kg	(HAND WASH) (WOOLLENS) (**) (COLD) to 40		

¹⁾ A 10 litre bucket holds approximately 2.5 kg of dry washing (cotton).

²⁾ In the case of the STAINS, a minimum temperature of 40°C is required for the stain remover to become effective.

³⁾ Creases in the washing are only largely prevented if the filling quantity of 1 kg is maintained.

⁵ to 7 easy-care men's shirts are equivalent to approximately 1 kg of dry washing.

Separate conditioning/starching/impregnation

Type of washing	Max. Filling quantity (dry weight)	Program selector
Cottons/Linen	5 kg	B (STARCHING)

Separate rinse

Type of washing	Max. Filling quantity (dry weight)	Program selector
Cottons/Linen	5 kg	
Easy Cares	2.5 kg	A (GENTLE DINCE)
Delicates	2.5 kg	A (GENTLE RINSE)
Woollens/Hand Wash	2 kg	

Separate spin

Type of washing	Max. Filling quantity (dry weight)	Program selector
Cottons/Linen	5 kg	D (SPIN)
Easy Cares	2.5 kg	
Delicates	2.5 kg	F (SHORT SPIN)
Woollens/Hand Wash	2 kg	

Cleaning and Care

Control panel

Important! Do not use any furniture cleaning agents or aggressive cleaning agents in order to clean panel and control parts.

Wipe control panels with a damp cloth. When doing so, use warm water.


Detergent Drawer

The detergent drawer should be cleaned from time to time.

- 1. Pull the detergent drawer out as far as it will go.
 - 2. Remove the detergent drawer by pulling sharply.
 - **3.** Take the conditioner insert out of the middle compartment.
 - **4.** Clean the conditioner insert under running water.




5. Clean the compartments with warm water from the rear side. It is best to use a flat brush



6. Push on the conditioner insert as far as it will go so that it is securely in place.

7. Use a brush to clean the entire rinsing-in section of the washing machine, particularly also the nozzles on the top side of the rinsing-in chamber.



8. Set the detergent drawer into the guide tracks and push in.

Washing Drum

The washing drum is made of stainless steel. Rusting foreign bodies in the washing can cause rust deposits on the drum.

Important! Do not clean the stainless steel drum with decalcifying agents containing acids, scouring agents containing chlorine or iron, or steel wool. Our Customer Service can provide suitable agents.

Remove any rust deposits on the drum using a stainless steel cleaning agent.

Main door

Check on a regular basis to see if deposits or foreign objects are present in or at the rubber sleeve behind the door, and remove.

Cleaning the drain pump

Paper clips, nails and so on can sometimes get into the washing machine with the washing and remain in the drain pump casing. Fluff and strands of fabric can gather on these items and block the drain pump. Therefore the drain pump should be cleaned at least once a year.



Warning! Switch off the washing machine and pull out the mains plug before cleaning the drain pump!


- 1. First carry out emergency emptying (see section "Carrying out emergency emptying").
 - **2.** Place a towel on the floor in front of the cover of the drain pump. Residual water can run out.
 - **3.** Unscrew the drain pump cover anticlockwise and pull it out.



4. Remove any foreign bodies from the pump housing.



5. Replace the cover. Insert the webs on the cover laterally into the guide slots and screw on the cover securely clockwise.



- **6.** Close the emergency emptying hose and place it in the holder.
- 7. Close the flap.



What to do if...

Remedying faults

In the event of a fault, try to solve the problem yourself with the aid of the information provided here. If you use the Customer Service to remedy one of the faults listed here or to remedy an operating fault, the customer service technician's visit will be subject to a charge, even during the warranty period.

- If the fault code *E 10*, *E20* or *E40* is shown in the multi display, you may be able to remedy the fault yourself (see the Faults table below). After remedying the fault, press the ◆/♦ (START/PAUSE) button. If the fault code is displayed again, inform the Customer Service.
- In the case of all other displayed faults (**E** and number or letter), please inform the Customer Service, stating the fault code.

Problem	Possible Cause	Remedy
	The mains plug is not plugged in.	Plug in the mains plug.
	The fuse of the building's wiring is not in order.	Replace the fuse.
The washing machine does not work.	The filling door is not correctly closed.	Close the filling door; The lock must engage audibly.
	♦ / ♦ (START/PAUSE) button not pressed long enough.	Press the $\diamondsuit/\diamondsuit$ (START/PAUSE) button until the program begins.
Filling door cannot be closed.	The child safety feature is set	Cancel the child safety feature (see Section "Child Safety Feature").
The fault code E40 appears. The display (MAIN WASH) flashes.	The filling door is not correctly closed.	Close the filling door correctly. Restart the program.

Problem	Possible Cause	Remedy
Water is not running. The fault code E 10 appears. The display + (RINSE+) flashes.	Water valve closed.	Open the water valve.
	Filter in screw connection of the intake hose blocked.	Close the water valve. Unscrew the hose from the tap, remove the sieve and clean under running water
	Water tap is blocked with limescale or is faulty.	Check water tap and have it repaired if necessary.
The washing machine vibrates during operation or it is on an uneven surface.	The transport packaging has not been removed.	Remove transport packaging according to the installation and connection instructions.
	The height-adjustable screw feet are not correctly set.	Adjust the feet according to the installation and connection instructions.
	There is not much washing in the drum (e.g. only one dressing gown).	This does not impair the operation of the machine.
	The water could not be completely pumped off before spinning because The drainage hose is bent or The solution pump is blokked.	Check the laying of the drainage hose and eliminate the bend if necessary, or clean the solution pump and, if required, remove foreign bodies from the pump housing.
The washing solution of the main wash froths up a lot.	Too much detergent was probably used	Meter the detergent exactly in accordance with the manufacturer's information.

Problem	Possible Cause	Remedy
Water runs out under the washing machine.	The screw connection on the intake hose is leaky.	Tighten the intake hose screw connection.
	The drainage hose is leaky.	Check the drainage hose and replace it if necessary.
	The washing solution pump cover is not correctly closed.	Close cover correctly.
	Washing is trapped in the filling door.	Abort the program and remove the washing through the filling door. Restart the program.
	The emergency drain hose is not correctly closed or is leaky.	Close the emergency drain hose correctly (see the section "Carrying out Emergency Drainage"). Call Customer Service if the emergency drain hose leaks.
Conditioner was not washed in, compartment & for care agents is filled with water.	The conditioner insert in the compartment for the care agent is not correctly attached or is blocked.	Clean the detergent drawer and attatch the conditioner insert securely.
Washing heavily creased.	Too mush washing probably put in.	Pay attention to the maximum filling quantity (see Program tables). In the case of easy-care textiles, select the program (EASY IRON).
Washing not well spun. Residual water still visible in the drum. The fault code E20 appears. The (RINSE) display flashes.	Drainage hose bent.	Remove the bend.
	Maximum pump head (discharge height 1 m from the unit's floor) is exceeded.	Contact your customer service. For pumping heights over Im he can offer you a conversion kit as a special accessory.
	Solution pump blocked.	Switch off the unit and pull out the mains plug. Clean the solution pump.
	If a siphon is connected: Siphon blocked.	Clean the siphon.

Problem	Possible Cause	Remedy
The filling door cannot be opened when the unit is switched on.	The filling door is locked due to a high water level or a high temperature. The ⊷ (DOOR) display is off.	Wait until the → (DOOR) display lights up green.
		If it is still necessary to open the filling door: turn the program selector to ○ (OFF) turn the program selector to C (PUMP OUT). Press the ◆/﴿ (START/ PAUSE) button. After the water has been pumped out, the filling door can be opened.
	Power failure! (All displays have gone off). For safety reasons the door remains locked for 4 to 5 minutes.	If water can be seen through the window in the door, first carry out emergency empty- ing (see section "Carrying out Emergency Emptying Opera- tion"). After approx. 4 to 5 minutes the door can be opened again by pulling the handle.
Remnants of detergent are building up in the detergent drawer.	Water valve not fully opened.	Open the water valve fully.
	Filter in the screw connection of the intake hose on the water valve or on the unit is blocked.	Close the water valve. Unscrew the intake hose from the water tap and from the unit. Clean the filter.
The rinsing water is murky.	The cause is probably a detergent with a high silicate content.	No negative effect on the rinsing result, use liquid detergent if necessary.
The corresponding display does not light up when one of the additional program buttons is pressed.	The selected additional program cannot be combined with the set program.	Make another selection.

If the washing results are not satisfactory

If the washing has turned grey and if limescale is deposited in the drum, then

- Too little detergent was used.
- The wrong detergent was used.
- Special soiling was not pre-treated.
- Program or temperature not set correctly.
- If multi-component detergents are used, the individual components were not used in the correct ratio.

If there are still grey spots on the washing,

- Washing soiled with ointments, grease or oils was washed with too little detergent.
- Too lower temperature was used for washing.
- A frequent cause is that softener particularly that in concentrated form has reached the washing. Wash out such spots quickly and use the softener concerned carefully.

If at the end of the last rinse foam is still visible

 Modern detergents can also cause foam in the last rinse. However, the washing is still sufficiently rinsed.

If there are white remnants on the washing

 These are insoluble components of modern detergents. They are not the result of an insufficient rinsing effect.
 Shake or brush out the washing. In future, perhaps you should turn the washing inside out before washing it. Examine your choice of detergent and if necessary use liquid detergent.

Carrying out emergency drainage

- If the washing machine no longer pumps off the washing solution, emergency drainage must be performed.
- If the washing machine is in a room where there is a risk of frost, emergency drainage must be performed if there is a possibility of frost.


In addition: unscrew the inlet hose form the water tap and place it on the floor. Empty the drainage hose.



Warning! Switch off the washing machine before performing emergency drainage and pull out the mains plug.

Caution! The washing solution escaping from the emergency drainage hose may be hot. There is a risk of scalding! Allow the washing solution to cool down before performing emergency drainage.

- 1. Place a flat collecting vessel in order to collect the washing solution which is draining off.
 - **2.** Fold open the flap in the right section of the base outwards and pull it off.



3. Remove the emergency drainage hose from its holder.



- **4.** Place the container under the hose.
- **5.** Detach the plug of the emergency drainage hose by turning it anticlockwise and pull it out.

The washing solution runs out. Depending on the amount of solution, it may be necessary to empty the collecting vessel several times. To do this, close the emergency drainage hose temporarily with the plug.



When the water is completely drained:

- **6.** Push the plug securely into the emergency drainage hose and turn it clockwise to secure it.
- **7.** Replace the emergency drainage hose in its holder.
- 8. Put on the flap and close.

Additional Rinse + ⟨₩∀⟩ (RINSE+)

The washing machine is set for extremely economical water consumption. However, for persons who suffer from allergies, it can be helpful to rinse with more water.

If + (RINSE+) is set, an additional rinse is carried out with the program (COTTONS/LINEN), (EASY CARES)/ (EASY IRON) and (DELICATES).

No additional rinse is set when the unit is delivered.

Set additional rinse:

- 1. Turn the program selector to (COTTONS/LINEN), (EASY CARES)/ (EASY IRON) and (DELICATES) with any temperature.
 - 2. Keep the (PRE WASH) and → (QUICK) buttons pressed simultaneously for at least 2 seconds. + (RINSE+) lights up on the program sequence display. The additional rinse is set. It remains saved until you cancel it again.
- The additional rinse increases water consumption and the program run time.

Cancel additional rinse:

- (COTTONS/LINEN), <u></u> (EASY CARES)/ (EASY IRON) or (DELICATES).

Child Safety Feature

If the child safety feature is set, the filling door can no longer be closed and no washing program can be started.

Setting the child safety feature


Use a coin to turn the rotary knob on the inside of the filling door clockwise as far as it will go.




Warning! The rotary knob must not be in a vertical position after adjustment, otherwise the child safety feature is not active. The rotary knob must project as shown in the diagram

Cancelling the child safety feature

Turn the rotary knob anticlockwise as far as it will go.





Installation and connection instructions

Installation Safety Precautions

- Do not tilt the washing machine onto its front or onto its right side (viewed from the front). Electronic components can get wet.
- Check the washing machine for transport damages. A damaged unit must never be put into operation under any circumstances. In the event of damage, please contact your supplier.
- Ensure that all parts of the transport safeguard are removed and that the unit is splash protected, see "Removing transport safeguard".
 Otherwise, the units or neighbouring furniture can be damaged when spinning.
- Always insert the plug into a correctly installed earthed socket.
- In the case of permanent connection: A permanent connection may only be made by an authorised specialist.
- Before putting the machine into operation, ensure that the mains voltage and current type shown on the unit's rating plate correspond with those at the place where the machine is being installed. The fuse rating is also found on the rating plate.
- The mains lead may only be replaced by the customer service or by an authorised electrician.

Installation of the appliance

 \mathbf{i}

Washing machines with curved panels are not suitable for installing under units


Transporting the appliance

- Do not place the washing machine on its front or on its right side (viewed from the front). Otherwise, electrical components can get wet.
- Never transport the unit without the transport safeguard. Do not remove the transport safeguard until the appliance is at the installation location. Transporting the unit without the transport safeguard can damage it.
- Lift the appliance neither by an open filling door nor by the base.
- When transporting the unit with a sack trolley: Attach the sack trolley only at the side.


Remove transportation protection

Important! It is essential to remove the transport safeguard before putting the unit into operation. Keep all parts of the transport safeguard in a safe place for possible later transport (moving).

1. Open both hose holders on the unit's rear side and remove the hoses and mains cable.




2. Pull both hose holders off the unit with a strong pull.




- The special key E and the caps D (2 each) and G (1 each) are supplied with it.
 - **3.** Unscrew the two screws with the special spanner.
 - **4.** Unscrew the 4 screws B with special spanner E.
 - **5.** Remove the transport rail C.
 - 6. Screw the 4 screws B back in.
 - **7.** Close the 2 large holes with the caps D.

Important! Press in the caps with sufficient strength so that they engage in the rear panel (protects the inside of the units against splash water).

- **8.** Remove the screw F, including the compression spring, with the special spanner E.
- **9.** Close the hole with the cap G. **Important!** Press in the cap with sufficient strength so that it engages in the rear panel (protects the inside of the unit against splash water).





Prepare the installation place

- The installation surface must be clean and dry, free of floor polish residues and other greasy coatings so that the unit does not slip away. Do not use lubricants as a sliding aid.
- Installation on a high-veil carpet or floor tiles with soft sponge backs is not recommended because the standing safety of the appliance is then no longer ensured.
- By installation surfaces with small-format tiles, lay a conventional rubber mat underneath.
- Minor unevenness of the floor surface should never be levelled out by laying pieces of wood, card or similar materials, but rather should always be compensated for by adjusting the screw feet.
- If, for space reasons, it is not possible to avoid setting up the unit directly next to a gas or coal-fired cooker: install a thermal insulation panel between the cooker and washing machine (85 x 57cm) which must have an aluminium film on the side against the cooker.
- The washing machine must not be set up in a room where there is a danger of frost. Frost hazard!
- Flexible feed and drain tubings may not be crinkled or squeezed.

Installation on a concrete base

If the unit is set up on a concrete base, for safety reasons it is essential to fit stand plates in which the washing machine is adjusted. The stand plates are available from Customer Service under the spare parts number 645 425 058.



Installation on vibrating floors

Where the floor vibrates, particularly in the case of wooden beam floors with pliable boards, securely screw a water-resistant wooden panel at least 15mm thick onto at least 2 floor planks. If possible, set up the unit in the corner of a room, as the wooden floor is optimally restrained there and is therefore least likely to be subject to resonance vibrations.


Compensate for floor unevenness

Floor unevenness can be compensated for and the height can be corrected with the four adjustable screw feet. The height can be adjusted in the range +10 .. -5mm.

To adjust the feet use the special spanner supplied for removing the transport braces.

- **1.** Slide the special key firmly onto the hexagon head of the threaded foot as far as it will go.
 - 2. Adjust the screw feet so that the unit is horizontal and stable. The unit must not wobble over when loaded
 - **3.** If necessary, check the setting with a spirit level.


Important! Minor unevenness of the floor surface should never be levelled out by laying pieces of wood, card or similar materials, but rather should always be compensated for by adjusting the adjustable feet.



Electrical connection

Details of the mains voltage, current type and required fuses can be found on the rating plate. The rating plate is located at the top above the filling door.

For permanent electrical connection within the electrical circuit, provi-



sions must be made which allow for electrical disconnection of the appliance from the mains with a contact opening of at least 3 mm at all poles. Suitable devices include circuit breakers, fuses (threaded fuses must be entirely removed from the socket), ground fault circuit interrupters and contactors. Permanent connection may only be carried out by an authorised electrician.

- This appliance complies with the following EC directives:
 - The "Low Voltage Directive" 72/23/EU with changes
 - The "EMC Directive" 89/336/EU with changes

Water connection

The washing machine has safety features which prevent back-contamination of the drinking water and which conform to the national regulations of the water authorities (e.g. for Germany: DVGW guidelines). This means that additional protective measures in the installation are not necessary.

Important!

- Units for connecting to cold water must not be connected to hot water.
- Use only new hose sets for the connection.

Permissible water pressure

The water pressure must be at least 1 bar (= $10 \text{ N/cm}^2 = 0.1 \text{ Mpa}$), maximum 10 bar = $100 \text{ N/cm}^2 = 1 \text{ Mpa}$).

- If more than 10 bar: Connect a pressure-reduction valve upstream.
- If less than 1 bar: Unscrew the inlet hose on the unit side at the solenoid intake valve and remove the flow regulator (to do this, remove the filter with pointed pliers and take out the rubber washer behind). Replace the filter.

Water inflow

A pressure hose of 1.35m in length is supplied.

If a longer inflow hose is required, only a VDE-approved, complete set of hoses with fitted hose screw connections offered by our Customer Service is permissible.

- Hose sets in lengths of 2.2m, 3.5m and 5m are available for washing machines without Aqua-Control.
- Hose sets in lengths of 2.0m, 2.9m and 3.5m are available for washing machines with Aqua-Control.


Important! Never cut into pieces in order to extend the hoses!

- Sealing rings are supplied either in the plastic nuts of the hose screw connection or in the enclosed pack. Do not use other seals!
- 1. Connect the hose with the angled connection to the machine.



Important!

- Do not lay the inlet hose vertically downwards, instead run it to the right or left as shown in the diagram.
- Tighten the hose screw connection only by hand.



- Connect the hose with the straight connection to a water valve with a screw thread R 3/4 (inches).
 Important! Only tighten the screw connection manually.
- **3.** By slowly opening the water valve before putting the washing machine into operation, check that the connection is free of leaks.



Water drain

The drainage hose can either be connected to a siphon or hung in a wash basin or discharge basin or a bath tub.


Only original hoses may be used for extensions (max. 3m laid on the floor and then up to 80cm high). Customer Service stocks drainage hoses in lengths of 2.7 and 4m.

Important! It is essential to lay the drainage hose without kinks.


Water drain-off inside a siphon


The grommet on the hose end fits all standard siphon types.

Secure the connection between the grommet and siphon with a hose clamp.



- Small basins are not suitable for drainage. Water could overflow!
- The end of the drainage hose must not be submerged in the pumped-out water. Otherwise, the water could be sucked back into the unit.
- When hanging in a wash basin or a bath tub, the drainage hose must be secured with the supplied attachable bend to prevent it slipping. The backsurge force of the escaping water could otherwise force the hose out of the basin.
- Tie the bend to the tap or the wall using a piece of string.







Delivery heads over 1m

To pump off the washing / rinsing solution, every washing machine has a drain pump which carries liquids up to a height of 1m via the drainage hose, calculated from the machine's standing surface.


Please contact Customer Service for delivery heads of over 1m.

Technical data

Adjustment possibility
Filling quantity (program-dependent)
Area of use
Drum speed, spinning
Water pressure

Approx. +10 / -5mm max. 5kg Domestic See rating plate 1-10 bar (= 10 - 100 N/cm² = 0.1 - 1.0 Mpa)

Dimensions



(dimensions in mm)

Guarantee conditions

Belgium

DECLARATION OF GUARANTEE TERMS.

Our appliances are produced with the greatest of care. However, a defect may still occur. Our consumer services department will repair this upon request, either during or after the guarantee period. The service life of the appliance will not, however, be reduced as a result.

This declaration of guarantee terms is based on European Union Directive 99/44/EC and the provisions of the Civil Code. The statutory rights that the consumer has under this legislation are not affected by this declaration of guarantee terms.

This declaration does not affect the vendor's statutory warranty to the end user. The appliance is guaranteed within the context of and in adherence with the following terms:

- 1. In accordance with provisions laid down in paragraphs 2 to 15, we will remedy free of charge any defect that occurs within 24 months from the date the appliance is delivered to the first end user.
 - These guarantee terms do not apply in the event of use for professional or equivalent purposes.
- 2. Performing the guarantee means that the appliance is returned to the condition it was in before the defect occurred. Defective parts are replaced or repaired. Parts replaced free of charge become our property.
- So as to avoid more severe damage, the defect must be brought to our attention immediately.
- **4.** Applying the guarantee is subject to the consumer providing proof of purchase showing the purchase and/or delivery date.
- **5.** The guarantee will not apply if damage caused to delicate parts, such as glass (vitreous ceramic), synthetic materials and rubber, is the result of inappropriate use.
- **6.** The guarantee cannot be called on for minor faults that do not affect the value or the overall reliability of the appliance.
- 7. The statutory warranty does not apply when defects are caused by:
 - a chemical or electrochemical reaction caused by water,
 - abnormal environmental conditions in general,
 - unsuitable operating conditions,
 - contact with harsh substances.
- 8. The guarantee does not apply to defects due to transport which have occurred outside of our responsibility. Nor will the guarantee cover those caused by inadequate installation or assembly, lack of maintenance or failure to respect the assembly instructions or directions for use.
- **9.** Defects that result from repairs or measures carried out by people who are not qualified or expert or defects that result from the addition of non-original accessories or spare parts are not covered by the guarantee.
- 10. Appliances that are easy to transport may be delivered or sent to the consumer services department. Home repairs are only anticipated for bulky appliances or built-in appliances.
- 11. If the appliances are built-in, built-under, fixed or suspended in such a way that removing and replacing them in the place where they are fitted takes more than half an hour, the costs that result therefrom will be charged for. Connected damage caused by these removal and replacement operations will be the responsibility of the user.

- 12. If, during the guarantee period, repairing the same defect repeatedly is not conclusive, or if the repair costs are considered disproportionate, in agreement with the consumer, the defective appliance may be replaced with another appliance of the same value. In this event, we reserve the right to ask for a financial contribution calculated according to the length of time it has been used.
- **13.** A repair under guarantee does not mean that the normal guarantee period will be extended nor that a new guarantee period begins.
- 14. We give a twelve month guarantee for repairs, limited to the same defect.
- **15.** Except in the event where liability is legally imposed, this declaration of guarantee terms excludes any compensation for damage outside the appliance for which the consumer wishes to assert his rights. In the event of legally admitted liability, compensation will not exceed the purchase price paid for the appliance.

These guarantee terms are only valid for appliances purchased and used in Belgium. For exported appliances, the user must first make sure that they satisfy the technical conditions (e.g.: voltage, frequency, installation instructions, type of gas, etc.) for the country concerned and that they can withstand the local climatic and environmental conditions. For appliances purchased abroad, the user must first ensure that they meet the qualifications required in Belgium. Non-essential or requested adjustments are not covered by the quarantee and are not possible in all cases.

Our consumer services department is always at your disposal, even after the guarantee period has expired.

Address for our consumer services department:

ELECTROLUX HOME PRODUCTS BELGIUM Bergensesteenweg, 719 - 1502 LEMBEEK Tel.: 02.363.04.44

Customer services

Belgium

Electrolux Home Products Belgium
ELECTROLUX SERVICE
Bergensesteenweg 719
1502 Lembeek

Province de Liège:
S.D.E.
04/343.11.60
04/343.47.68
Rue Gaucet 26
4020 Liege

Other Countries

Weitere Kundendienststellen im Ausland

In diesen Ländern gelten die Garantiebedingungen der örtlichen Partner. Diese können dort eingesehen werden.

Further after-sales service agencies overseas

In these countries our AEG agents' own guarantee conditions are applicable. Please obtain further details direct.

Autres agences étrangères assurant le service après-vente

Dans ces pays, les conditions de garantie des concessionnaires de la région sont valables. Vous pouvez les consulter sur place.

Otros puntos de Postventa en el extranjero

En estos países rigen las condiciones de nuestros representantes locales. las cuales pueden ser consultadas allí mismo.

Ulteriori uffici del servizio tecnico assistenza clienti all'estero

In questi paesi sono valide le condizioni di garanzia dei partner locali. Queste condizioni possono essere esaminante sul luogo.

Serviços de assistência técnica no estrangeiro

Nestes países são válidas as condições de garantia dos concessionários locais, podendo aí ser consultadas.

U.A.E. Abu Dhabi	Jordan	Malta
Universal Trading Company	Jordan Household	ITC
P.O. Box 43 99	Supply Co. Ltd.	International Trading Com-
Tel.: 335331	P.O. Box 3/68	pany
	Amman/Tel.: 69 70 50	White House Building
		Mountbatte Street
		Blata L-Bajda/Tel.: 220644

Egypt

Middle East Commercial Center P.O. Box 19

Kairo-Heliopolis Tel.: 29917/31634

Australia

ANDI-Co Pty. Ltd 9 Kingston Town Close Oakleigh VIC 3166 Tel.: (03) 9569 1235

Fax: (03) 9569 1450

Bahrain/Arabian Gulf

A.A. Zayani & Sons P.O. Box 9 32 **Bahrain**

Tel.: 261060

Bulgaria

Electrolux Bulgaria E.O.O.D. 91 Levski Blvd. 1000 Sofia

Tel.: 2 806676 Fax. 2 980 5276

Cyprus

Hadiikvrlakos & Sons Ltd. Prodromou 121 P.O. Box 21587 Nicosia 1511

Service Telephones: Nicosia 02 481226

Limassol 05 562182

Larnaca 04 633929 Paphos 06 932 699

Estonia

Electrolux Estonia Ltd. Mustamäe tee 24 EE0006 Tallinn

Tel.: (372) 6 650 090 Fax: (372) 6 650 092 Kanada

EURO-LINE Appliances 2150 Winston PARK Drive 20 P.O. 7 54 Oakville, Ontario L6H 5V1

Tel: 905 829 3980 Fax: 905 829 3985

Korea (South)

Core Incorp. 3/F Chewoo Blda. 200 Nonhyun-Dong Kangnam-Ku

Seoul

Telefon 82 2 549 89 61

Croatia

Electrolux D.O.O. Suplova 7 10000 Zagreb Tel.: 1 61 19512

Fax: 1 61 19513

Kuwait/Arabian Gulf

Ali Al-Ghanim Est. P.O. Box 10 83 Tel.: 5322463

Fax: 5242114

Lebanon

Adib & Assaferi P.O. Box 539

Tripoli

Latavia

Electrolux Latavia Ltd. Terlaton Street 42/44

1011 Riga Tel.: 371 2 297821

Fax: 371 2 821286

Mauritius

Happy World Centre Ltd.

1 Chausee Street Port Louis

Tel.: 25355

Namibia

AEG NAMIBIA (PTY) LIM-ITED-Jeppe Street Northern Industrial Area

Windhoek

Tel.: (061) 21-6082/4 Fax: (061) 217838

New **7**ealand

Euro-Life New Zealand Ltd. Privat Bag 58 Symonds Street

Auckland

Tel.: (09) 525 2222

Nouvelle Caledonie

Socometra N.C. B.P. 483 Nouman

Tel.: 275444

Oman

Moshin Haider Darwish P.O. Box 1 35

Muscat Tel.: 703743

Poland

Electrolux Poland Sp. zo.o. ul. Domaniewska 41 02-034 Warszawa

tel.: 022 874 33 33 fax: 022 874 33 00

Hongkong

Wo Kee Services Ltd. 585-609 Castle Peak Road Kwai Chung N.T. Hongkong

Tel.: 2494 4000

Israel

Electricity & Electronic Services-Evis LTD. 19 Hataasia st. Raanana.

Industrial area 43654 Tel: 972-9-7448118 Fax: 972-9-7603618

e-mail:evis@evis.co.il

Japan

Electrolux Japan Ltd. Yasuda Warehouse 4F 3-3-12 19 Tanglin Road 06-07 Heiwaiima Ota-Ku

Tokyo

Tel.: 81 3 3544 3363 Fax: 81 3 3763 6143

Thailand

OLYMPIA Thai Ltd. 44 Ratchadapisek Road 10320 Bangkok Tel.: 2 513 6111

Fax: 2 513 2574

Hungary Electrolux Lehel KFT (AEG Div)

Erzsebet'Kiralyne Utja 87 1142 Budapest

Tel.: 00361/251 84 44

Lthuania

Flectrolux I thuania Verkui 29 2600 Vilnus

Tel.: 372 272 3326 Fax: 372 272 3366

Malavsia

Arzbergh Engineering No. 49A/B. Jalan Petaling Utama 7 4600 Petaling Java Tel.: 3 795 1084

Fax: 3 795 1082

Singapore

Arzberah Engineering Singapore 247909 Tel.: 65 7356572

Fax: 7351124

Slovakia Rep.

Electrolux Slovakia S.R.O. Seheriniho 1 821 03 Bratislava Tel.: 7 4333 9745 Fax: 7 4333 6976

USA

ANDI Co. Appl. Inc. East 65 Campus Plaza Edison, New Jersey 0837 USA/Tel.: (201) 2258839

Russia

Electrolux Russia Ltd. 16 Olympiysky prospekt 129090 Moscow Tel.: (095) 937 7837

Fax: (095) 926 5513

Saudi Arabia

Alia Trading Corporation P.O. Box 4101 King Abdul Aziz Street Rivadh Tel.: 4645977

Al Nahas Est. Musaidia Market I P.O. Box 1 15 29 Jeddah

Tel.: 6606852

Slovenia

Flectrolux Slovenia D.O.O. Traska Ul. 132 1000 Ljubljana

Tel.: 61 1234 137 Fax: 61 1234 238

South Africa

AEG (Pty) Ltd. 55, 12th Road P.O. Box 1 02 64 Kew/Johannesburg 2000

Tel.: 8069111

Svria

Masri & Shami P.O. Box 24 96 Damascus Tel.: 214080

INDEX


Α	P
Abort program	Pre wash12, 18, 19, 21, 25
C	Pre-wash detergent
Care agent9	Program sequence display 10, 22
Change program	Pump out11
Child safety feature30, 37	Q
Clothes sensitive	Quick wash
Conditioner9, 11, 16, 17, 21, 26	R
Cottons	Rating plate9, 43, 55
Curtains14, 25	Rinse hold11, 18, 24
Customer Service13, 28, 30, 55	Risk of frost
Customer service	Run time
D	S
Delay timer	Silk
Delicates	Soaking12, 18, 19, 21, 25
Detergent	Spin11, 17, 18, 23, 26
Detergent dispenser drawer	Spots12, 23, 25
Detergent drawer	Stain 8, 9, 18, 34
Drain pump9, 29	Stain removers21
E	Starching
Easy iron	U
Easy-cares	Update
Emergency drainage	W
Energy saving10, 25	Warranty6, 30, 47
•	Washing
Fabric softener	coloureds14
Filling quantity13, 25	lightly soiled8
G	normally dirty8
Gentle rinse	slightly dirty12
Н	Washing powder9
Hand wash	Water hardness
1	pump off
In-wash stain treatment9	softener 8, 9, 16, 21
L	Woollens
Linen10, 15, 25, 26	hand-washable
M	
Multi-display 10, 19, 22, 30, 55	
0	
Open the door 20, 24, 33	
Over-dosed	

Service

In the chapter "What to do if...", some faults are listed which you can remedy yourself. Look there first if a fault occurs. If you do not find any information there, please consult your Customer Service. (You can find the addresses and telephone numbers in the section "Customer Service Centres".)

Always prepare in advance for the discussion. By doing so you will simplify the diagnosis and the decision on whether customer service is necessary.

Note the PNC number and S. number. You will find both on the rating plate on the inside of the door of your washing machine.



PNC

Answer as precisely as possible:

- What form does the fault take?
- Under what circumstances does the fault occur?
- Does the multi display show an error message?

When do you incur costs even during the warranty period?

- If you could have remedied the fault yourself with the aid of the fault table (see the section "What to do if..."),
- If several journeys by the customer service technician are necessary because for example he did not receive all the important information before his visit and must collect spare parts. These multiple trips can be avoided if you prepare your phone call as described above.

AEG Hausgeräte GmbH Postfach 1036 D-90327 Nürnberg

http://www.aeg.hausgeraete.de

© Copyright by AEG

822 942 703-01-180102-05

Subject to change without notice